

G9671

HYDRAULIC BEARING PULLER WITH INTEGRATED PUMP




HIGH PULLING FORCE

Delivers 12 tons of pulling force, ensuring efficient removal of bearings and other press-fitted components



ENHANCED LOAD CAPACITY

Claw load exceeds 120% of the rated load, ensuring reliable performance under heavy-duty conditions

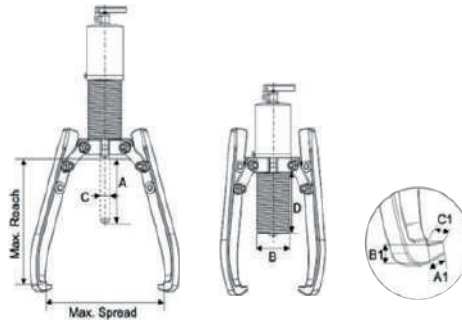

Output Force

12T

Claw Depth

260mm

SCOPE OF DELIVERY



SPECIFICATION

Force		12t
Stroke		85mm
Pressure Area		14.45cm ²
Claw Depth		260mm
Claw Distance		375mm
Top	B	60mm
	C	28mm
	D	118mm
Claw End	A1	14mm
	B1	10mm
	C1	29mm
Weight		9.5kg